


# YOUR DATA, ANYWHERE, ANYTIME

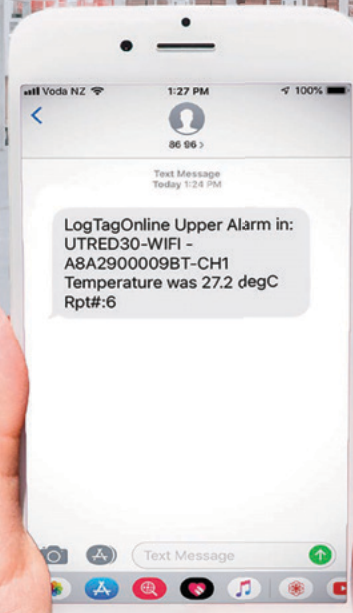

# LogTag<sup>®</sup>

## UTRED30-WiFi


30 Day WiFi Dual-Channel Logger




The LogTag® UTRED30-WiFi dual-channel temperature data logger automatically uploads real-time temperature data to your LogTag® Online cloud account via your existing wireless network.

The logger also has a non-volatile memory that holds up to 32,000 temperature readings, or 16,000 readings per channel. A statistical memory storing maximum and minimum readings and alarm durations for each of the last 30 days.


## Accessories




**2x AAA Batteries**  
Not Included




**USB Cable**  
Included



**AC Adapter<sup>^</sup>**  
Included



**UTRED/UTREL30 Wall Mount**  
Not Included



**Glycol Buffer**  
Not Included



**Socket Cover<sup>\*</sup>**  
Included (Optional to use)



**External Probe<sup>\*\*</sup>**  
Not Included. (Required)

Compatible probes below:

<b>ST100J</b>	40mm tip length, ø3.2mm.
<b>ST100K</b>	65mm tip length, ø3.2mm.
<b>ST100L</b>	90mm tip length, ø3.2mm.
<b>ST100S</b>	22mm tip length, ø5mm.
<b>ST100T</b>	105mm tip length, ø5mm.
<b>ST100H</b>	Handled with 105mm tip length, ø5mm.
<b>ST100B</b>	Untipped (bare probe).
<b>STX50</b>	5 Meter extension cable for ST10/ST100 probes.

<sup>^</sup>US and EU adapter only

<sup>\*</sup>Optional to insert inside an unused Channel port

<sup>\*\*</sup>Hot swappable external sensor probes.

Probes are available with a 1.5m or 3m cable.  
E.g. ST100J-15 for 1.5m or ST100J-30 for 3m cable

# Features



Real-time data automatically uploaded via WiFi to the LogTag Online cloud.




Download data via LogTag Analyzer or as a PDF (no software required) when Wi-Fi is unavailable.



Configure Wi-Fi settings using LogTag Mobile application and Bluetooth®.



Check and reset Min-Max temperature reading at any time.



Read current temperature and latest Min-Max temperature at a glance.




View alarm status for up to 30 days at a glance.



Audible alarm and flashing red LED signals a temperature alarm.



Measure and store up to 16,000 readings for each channel – enough for 67 days at 6 minute logging.



Can be powered by 2x AAA batteries (user replaceable) if external power is lost.



Second battery backup via a coin cell to ensure no data is lost.



Auto-pause function suspends alarm & statistic processing when the external probe is unplugged.



Two socket external probe with auto channel swap function.

# Applications

---



Pharmaceutical



Healthcare



Cold Room and Storage



Medical Centres



Warehousing

# Specifications

<b>Product Model</b>	UTRED30-WiFi
<b>Sensor Measurement Range</b>	-40°C to +99°C (-40°F to +210°F)
<b>Operating Temperature Range</b>	-30°C to +60°C (-22°F to +140°F)
<b>Storage Temperature Range</b>	-10 °C to +40 °C (32 °F to +104 °F)
<b>Rated Temperature Reading Resolution</b>	Better than 0.1°C (0.2°F) for -30°C to +60°C (-22°F to +140°F). Better than 0.2°C (0.4°F) for -40°C to -30°C (-40°F to -22°F). Better than 0.5°C (0.9°F) for +60°C to +99°C (+140°F to +210°F).
<b>Rated Temperature Reading Accuracy</b>	Better than ±0.5°C (±0.9°F) for -20°C to +40°C (-4°F to +104°F), typically ±0.3°C (0.6°F) Better than ±0.8°C (±1.4°F) for -40°C to -20°C (-40°F to -4°F), typically ±0.5°C (0.9°F) Better than ±0.8°C (±1.4°F) for +40°C to +70°C (+104°F to +158°F), typically ±0.7°C (1.3°F) Better than ±1.2°C (±2.2°F) for +70°C to +99°C (+158°F to +210°F), typically ±1°C (1.8°F)
<b>Probe Connectivity</b>	Up to 2
<b>Probe Compatibility</b>	All ST100 precision thermistor external probes can be interchangeably connected to the UTRED30-WiFi. Please refer to the page for External Probes on the LogTag North America website.
<b>Recording Capacity</b>	32,000 total log memory. Provides 16,000 temperature readings per channel. Day summary statistics memory (for display on LCD): up to 30 days of Min/Max/duration and alarm trigger statistics.
<b>Sampling Interval</b>	Configurable from 30 seconds to 18 hours
<b>Logging Start Options</b>	Push button start (with configurable start delay from 1 minute to 72 hours) or specific date & time
<b>Download Time</b>	Typically with full memory (32,130 readings) in less than 10 seconds
<b>Environmental</b>	IP51 (when vertically mounted or hung with USB dust-cap in place)
<b>Calibration</b>	Factory calibrated using NIST equivalent reference equipment. Calibration certificate available on request
<b>Power Source</b>	5V via micro USB socket or, 2 x 1.5V AAA batteries. CR2032 LiMnO <sub>2</sub> coin cell (backup logging function only)
<b>Battery Life</b>	Device should normally be powered via USB. AAA batteries provide backup power for up to 2 months
<b>Connection Interface</b>	USB 2.0 / Micro-USB plug
<b>WiFi</b>	802.11 b/g/n
<b>Bluetooth®</b>	Bluetooth® V4.2 BR/EDR and Bluetooth LE®
<b>Size</b>	141mm(H) x 72mm(W) x 18mm(T)
<b>Weight</b>	158g with AAA batteries, (134g - excluding probe and AAA batteries)
<b>Case Material</b>	Polycarbonate

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by LogTag North America Inc. is under license. Other trademarks and trade names are those of their respective owners.



## Connection Software

Real-time data automatically uploaded via WiFi to the LogTag Online cloud.

For more information on LogTag Online, please visit our website:

[logtagrecorders.com/online](http://logtagrecorders.com/online)

